



# Hydrotuf


Hydrotuf is equipped with an innovative lid and lock ring for easy access to a large capacity 2.25L strainer basket, minimising pump maintenance. Hydrotuf is ideal for large pools with ancillary systems such as heating, in-floor cleaning, vacuum cleaning, fountains and jets

## Efficient Impeller and Diffuser Design

The pump's impeller and diffuser design maximizes the hydraulic output of the pump while minimising turbulence. The pump's efficient hydraulic performance shortens run times and reduces energy consumption leading to lower operating cost.

## Engineered Durability

The pump body is manufactured utilising state of the art engineering plastic moulding with a single piece strainer pot and volute for extra strength.

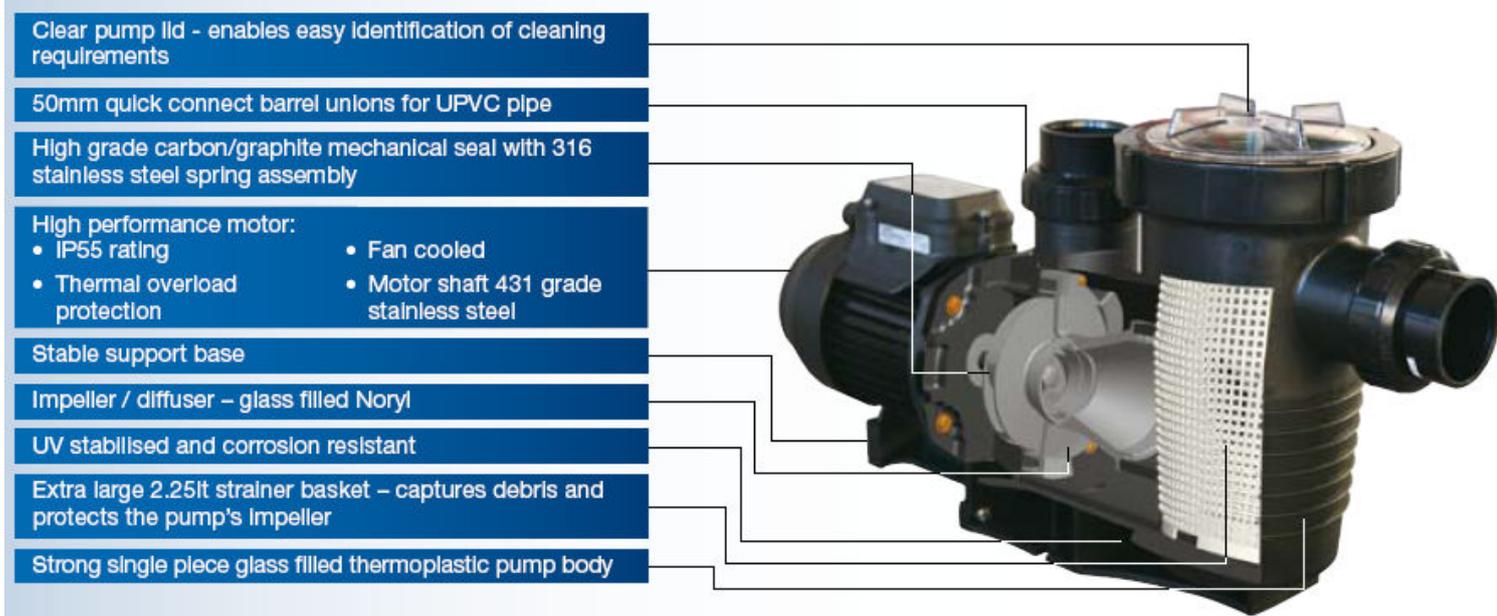

Model	HP	Pmax kW	Amps	Phase	Total Length	Motor Frame	Flow Rate Qmax.
2410755EUM	0.75	0.63	2.9	1	587	71	16.7m <sup>3</sup> /hr
24107553EUM	0.75	0.60	1.2	3	587	71	16.7m <sup>3</sup> /hr
2411005EUM	1.00	0.86	4.0	1	587	71	21.8m <sup>3</sup> /hr
24110053EUM	1.00	0.86	1.9	3	587	71	21.8m <sup>3</sup> /hr
2411255EUM	1.25	0.95	4.0	1	587	71	24.9m <sup>3</sup> /hr
24112553EUM	1.25	1.01	2.0	3	587	71	24.9m <sup>3</sup> /hr
2411505EUM	1.50	1.10	4.7	1	608	80	27.4m <sup>3</sup> /hr
24115053EUM	1.50	1.09	2.1	3	608	80	27.4m <sup>3</sup> /hr
2412005EUM	2.00	1.50	6.8	1	629	80	33.2m <sup>3</sup> /hr
24120053EUM	2.00	1.43	2.6	3	629	80	33.2m <sup>3</sup> /hr
2412505EUM	2.50	1.81	8.5	1	653	90	35.8m <sup>3</sup> /hr
24125053EUM	2.50	1.73	3.6	3	653	90	35.8m <sup>3</sup> /hr
2413005EUM	3.00	2.06	9.7	1	670	90	37.1m <sup>3</sup> /hr
24130053EUM	3.00	1.99	3.7	3	670	90	37.1m <sup>3</sup> /hr



**ZOOTECH**

Aqua & LSS Specialists for Zoos & Aquaria

©Copyright 2014